


## Mobile Heat Exchanger HE 800

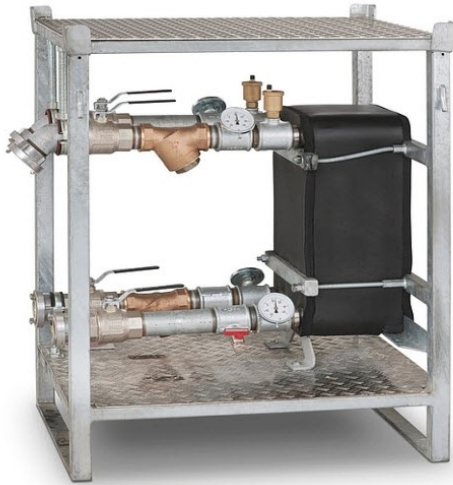

### Properties

- 800 kW heating capacity w/ 90/70°C – 80/60°C
- 150 kW cooling capacity w/ 0/5°C – 7/12°C
- For system separation
- Compact design
- Easy to install yourself
- Quick connection of flexible hoses
- Different pressure areas / media
- Also for outdoor installation

## Specifications

<b>Cooling effect</b>	kW	150
<b>Heat capacity</b>	kW	800
<b>Dimensions L x W x H</b>	mm	1560 x 600 x 1050
<b>Weight</b>	kg	150
<b>Medium cooling</b>		Ethylene glycol 30% (primary), water (secondary)
<b>Inlet temperature</b>	°C	0°C (primary), 12°C (secondary)
<b>Discharge temperature</b>	°C	7°C (primary), 5°C (secondary)
<b>Mass flow cooling</b>	kg/h	35028 (primary), 30571 (secondary)
<b>Medium thermal heat</b>		Water (primary and secondary)
<b>Thermal heat inlet temperature</b>	°C	90°C (primary), 60°C (secondary)
<b>Thermal heat outlet temperature</b>	°C	70°C (primary), 80°C (secondary)
<b>Mass flow heat</b>	kg/h	34412 (primary), 34470 (secondary)
<b>Primary adapters round trip</b>	inches	3
<b>Secondary adapters round trip</b>	inches	3

Subject to technical changes